




806 Service valve



specification

- copper x swivel union
- screw driver operated
- CP brass body

Connection	Code	Total (kg)
15mm x 1/2"	521007	0.11

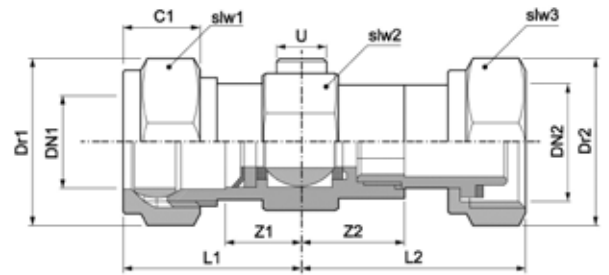

Dimensions (mm)


	C1	Dr1/Dr2	DN1/DN2	L1	L2	slw1/sl3	slw2	U	Z1	Z2
15mm	14.0	27.0	1/2"	31.0	37.0	25.0	22.0	8.0	11.0	17.0

Material specification

Nr	Component	Material
1	Body	CP brass
2	Ball	CP brass
3	Ball circlip	Stainless steel
4	Stem	CP brass
5	Stem 'O' ring	EPDM
6	Ball seals	PTFE
7	Compression nuts	CP brass
8	Spigot	CP brass
9	Swivel nut	CP brass
10	Washer	Red fibre (non-asbestos)

Maximum pressure conditions

Size	Maximum pressure conditions		Test Pressure		Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure	
	Max Pressure (bar)	Min/Max Temperature (°C)	Shell (bar)	Seat (bar)			Shell (psi)	Seat (psi)
15mm	16.0	4° + 120°C	24.0	17.5	232.1	39.2° + 248°F	348.1	253.8

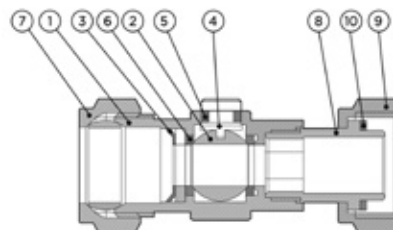

Pressure & temperature ratings

