



808 Service valve

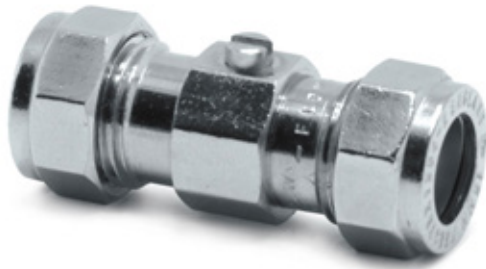

specification

- copper x copper
- screw driver operation
- CP brass body

Connection	Code	Total (kg)
15mm	523007	0.11
22mm	523008	0.16

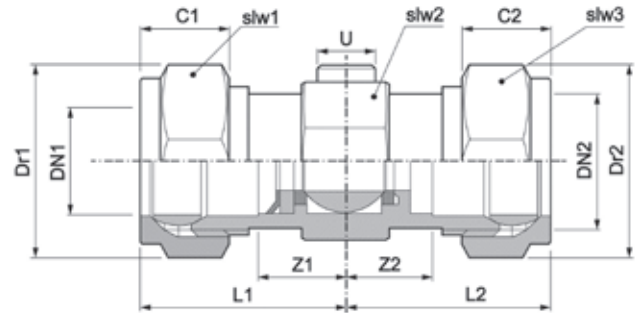

Dimensions (mm)


	C1/C2	Dr1/Dr2	DN1/DN2	L1	L2	slw1/sl3	slw2	U	Z1	Z2
15mm	13.0	26.0	DN15	31.0	32.0	26.0	22.0	6.0	14.0	15.0
22mm	13.0	32.0	DN22	30.0	35.0	32.0	23.0	13.0	13.0	18.0

Material specification

Nr	Component	Material
1	Body	CP brass
2	Ball	CP brass
3	Ball circlip	Stainless steel
4	Stem "O" ring	EPDM
5	Ball seals	PTFE
6	Compression nuts	CP brass
7	Compression olives	Brass

Maximum pressure conditions

Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
15 to 22mm	16.0	4° + 120°C	24.0	17.5	232.1	39.2° + 248°F	348.1	253.8

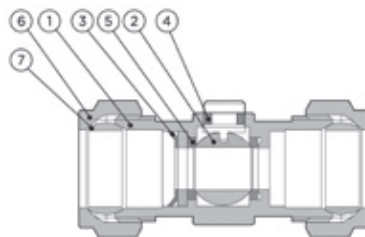

Pressure & temperature ratings

